



Terra-Mulch® Terra-Wood™ with UltraGro™ Wood Fiber


Now with TriFlo!™ — makes the best hydraulic mulch even better!

- Improves moisture retention
- Improves the suspension of mulch, seed and fertilizer within the slurry and prevents the dewatering of the fiber mulch
- Improves the application of hydraulic mulch in a more uniform layer for better coverage and enhanced product performance
- Improves application efficiency by increasing shooting distance and enhancing hose performance—greatly reducing downtime associated with clogging



Delivers up to 30% more coverage than competitive brands

- Terra-Wood™ contains 100% of the highest-grade Thermally Refined® wood fiber
- Thermally Refined wood fiber delivers up to 50% more water-holding capacity than atmospherically refined wood mulches
- Now combined with UltraGro™—a proprietary biostimulant
- UltraGro increases root mass to improve nutrient and water uptake, giving plants greater stress tolerance
- Terra-Wood forms an interlocking ground cover, which readily absorbs water and allows infiltration to the underlying soil
- Non-toxic and environmentally safe
- Meets or exceeds all requirements for wood fiber mulch
- Maximum slope length of 28 feet
- Use approved hydroseeding equipment for optimum pumping and application performance
- Terra-Wood with UltraGro functional longevity is ≤ 3 months

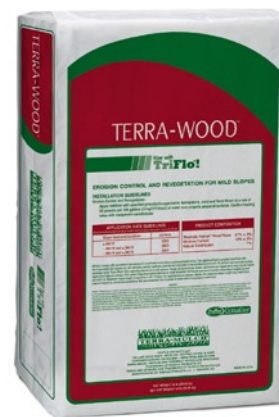

Product Composition:

Thermally Refined® Wood Fibers – 87% ± 3%
Moisture Content – 12% ± 3%
Natural Biostimulant – 1%
(40) 50-lb bales per pallet

Slope Gradient/Condition
≤ 4H:1V
> 4H:1V and ≤ 3H:1V
> 3H:1V and ≤ 2H:1V

Rate
2000 lb/acre
2500 lb/acre
3000 lb/acre



PROFILE Products LLC · 750 Lake Cook Road · Suite 440 · Buffalo Grove, IL 60089

Technical Assistance: 800-508-8681

www.profileproducts.com