

ERO-GUARD

MATERIALS DATA SHEET:

Product Name: EG- 2X

Manufacturer: Ero-Guard, Inc.

Contact: Brian F Dingels (612) 382-2783

Physical Description:

Size: Available in 16', 8', and 4" widths; varied lengths

Netting: 2 Layers (top and bottom) of .5" x .5" opening, approximately 15 lbs/1000 yd² photodegradable, green polypropylene plastic netting.

Thread: 600 denier degradable split yarn


Matrix: 100% Great Lakes aspen wood fiber, .73 lbs/yd²

Packaging: All rolls are wrapped tightly with stretch wrap to protect the rolled erosion control product from the weather and elements.

Special Features: EG-2x has a 4" folded edge on both sides of the 16' and 8' folded and 1 cut on the 8' creating a stronger blanket and a cleaner edge.

Recommended Applications: EG-2x is recommended for use on slopes up to 3:1 and in low flow channels.

Recommended Installation pattern: The leading edge is to be trenched into a 6" deep trench and the blanket is to be placed parallel to the anticipated water flow. When more than 1 blanket is required, they are to be overlapped 6" on all overlapping sides and tiled in a shingle type pattern as to not let the water underneath the blanket.

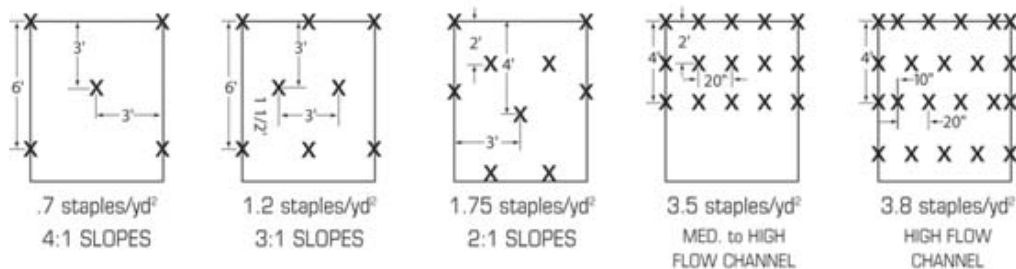

Your Leader In Erosion Control Blankets

412 Hwy 22 South · Mapleton, MN · 56065
Phone: (651) 209-1100 · Fax: (651) 917-0111